

# Iceblink<sup>V3</sup>

## Supercontinuum Fiber Laser

Iceblink is a supercontinuum fiber laser covering the 450-2300 nm spectral range with over 3W of average power and superior stability (<0.5% std. dev.).

The spatial coherence and broad spectrum of the Iceblink makes it a great alternative to a classic lamp, single-line lasers, LEDs and ASE sources.

It is a very versatile white light source with a world of applications in the scientific and industrial sectors, including absorption/transmission measurements for material characterization, VIS, NIR and IR spectroscopy, single molecule spectroscopy and fluorescence excitation.



**Spectral Range**      **Average Power**  
 450 - 2300 nm      ≥ 3 W

**Visible Range (450-850 nm)**  
**Average Power:**  
 ≥ 150 mW

### / Highlights

- VIS+NIR Power Balanced
- Outstanding Power Stability
- 150 mW Average Power in Visible Range


### / Applications

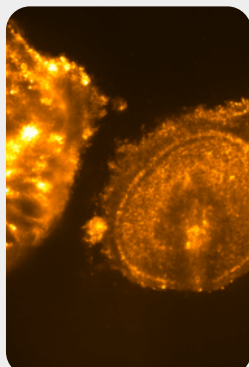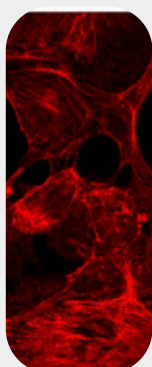

- Microscopy (FRET, TIRF, CLSM...)
- Absorption / Transmission / Reflection Spectroscopy
- Optical Device Characterization
- Metrology
- Hyperspectral Imaging

# Iceblink<sup>V3</sup>

## / Optical Spectrum

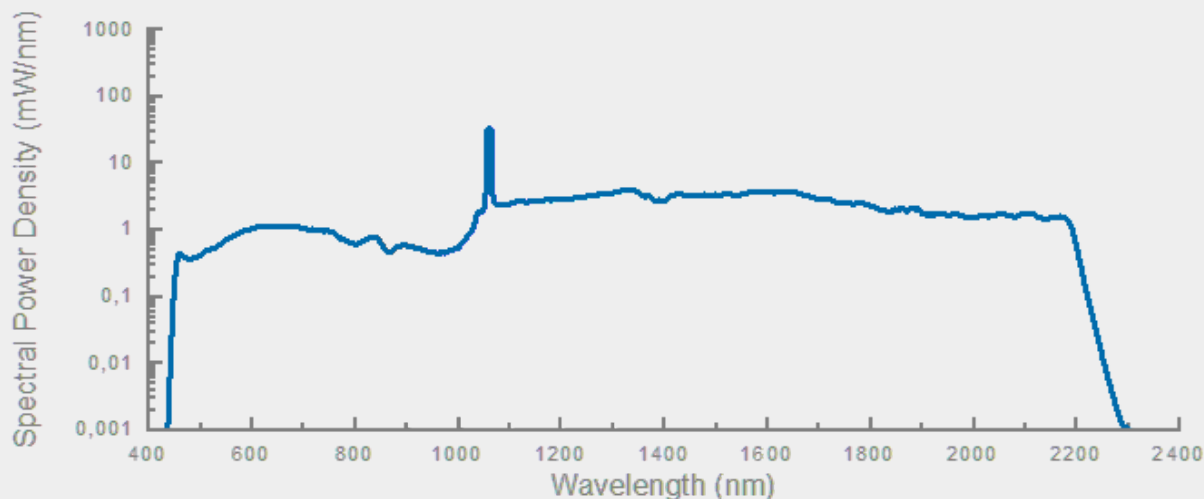

## / Accessories

### Tunable Visible Range

BOREAL and BOREAL NIR are the accessories for supercontinuum lasers to choose any wavelength.

The perfect white laser plug-in accessory for bioimaging, nanophotonic and more.



**Spectral Range:**

400\* - 1000 nm / 1000 - 1700 nm

**Optical Output:**

Free space or Fibre output (1 m) (Collimated output customizable)

**Bandwidth:**

10 - 600 nm

**Simultaneous selectable band:**

1

**Resolution:**

1 nm

**Insertion losses (full bandwidth):**


- ≤ 10 % (free space output)
- ≤ 30 % (Multimode fibre output)
- ≤ 60 % (Single-mode fibre output)

\* Initial wavelength depends on the supercontinuum source

# Iceblink<sup>V3</sup>

## / Technical Specifications

<b>Spectral Range:</b> 450 - 2300 nm	<b>Average Power:</b> ≥ 3 W	<b>Visible Range (450-850 nm)</b> <b>Average Power: ≥ 150 mW</b>
Repetition Rate:	80 ± 2 MHz	
Pulse Duration:	≤ 10 ps (@ 1060 nm) / ≤ 250 ps full spectrum*	
Average Power Stability:	≤ 0,5 % (std. dev.)	
Polarization:	Unpolarized	
Output Port:	Single Mode Fiber. 1 m length (customizable)	
Optical Output:	Collimated (in the range 450-1000 nm), Single-mode across full spectrum	
Synchronization / Connections:	TTL (SMA); NIM (SMA) Under request	
Beam Diameter @ 1 m of distance:	@ 470nm ≤ 2mm / @ 580nm ≤ 2.5mm / @ 725nm ≤ 3.5mm / @ 1150nm ≤ 5.5mm	
Spatial Mode Quality (M <sup>2</sup> ):	≤ 1.2	
Cooling:	Thermoelectric cooler + air cooling	
Power Requirements:	110 – 220 V, 50/60 Hz.	
Operating Temperature:	20 - 30 °C	
Storage Temperature:	0 - 60 °C	
Dimensions:	436x560x151 (WxDxH)	
Control :	Manual / Software via USB	
Safety Connections:	Interlock / Key	

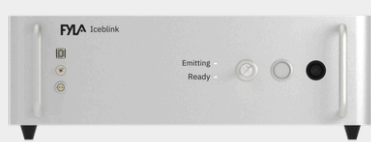

436 mm

151 mm



560 mm

OTHER DETAILED SPECS UNDER REQUEST

\*Estimated value

# Iceblink<sup>V3</sup>

## / Additional information



Laser Security:

This product is a Class 4 laser.

CAUTION – VISIBLE AND INVISIBLE LASER RADIATION  
AVOID EYE AND SKIN EXPOSURE TO DIRECT OR SCATTERED  
RADIATION.

Appropriate safety measures according to such laser class  
should be taken in its installation and use.

Warranty:

12 months warranty.

Extended warranty on request.



## / FYLA contact

Sales contact

[sales@fyla.com](mailto:sales@fyla.com)

+34 607 97 10 21